





Modul

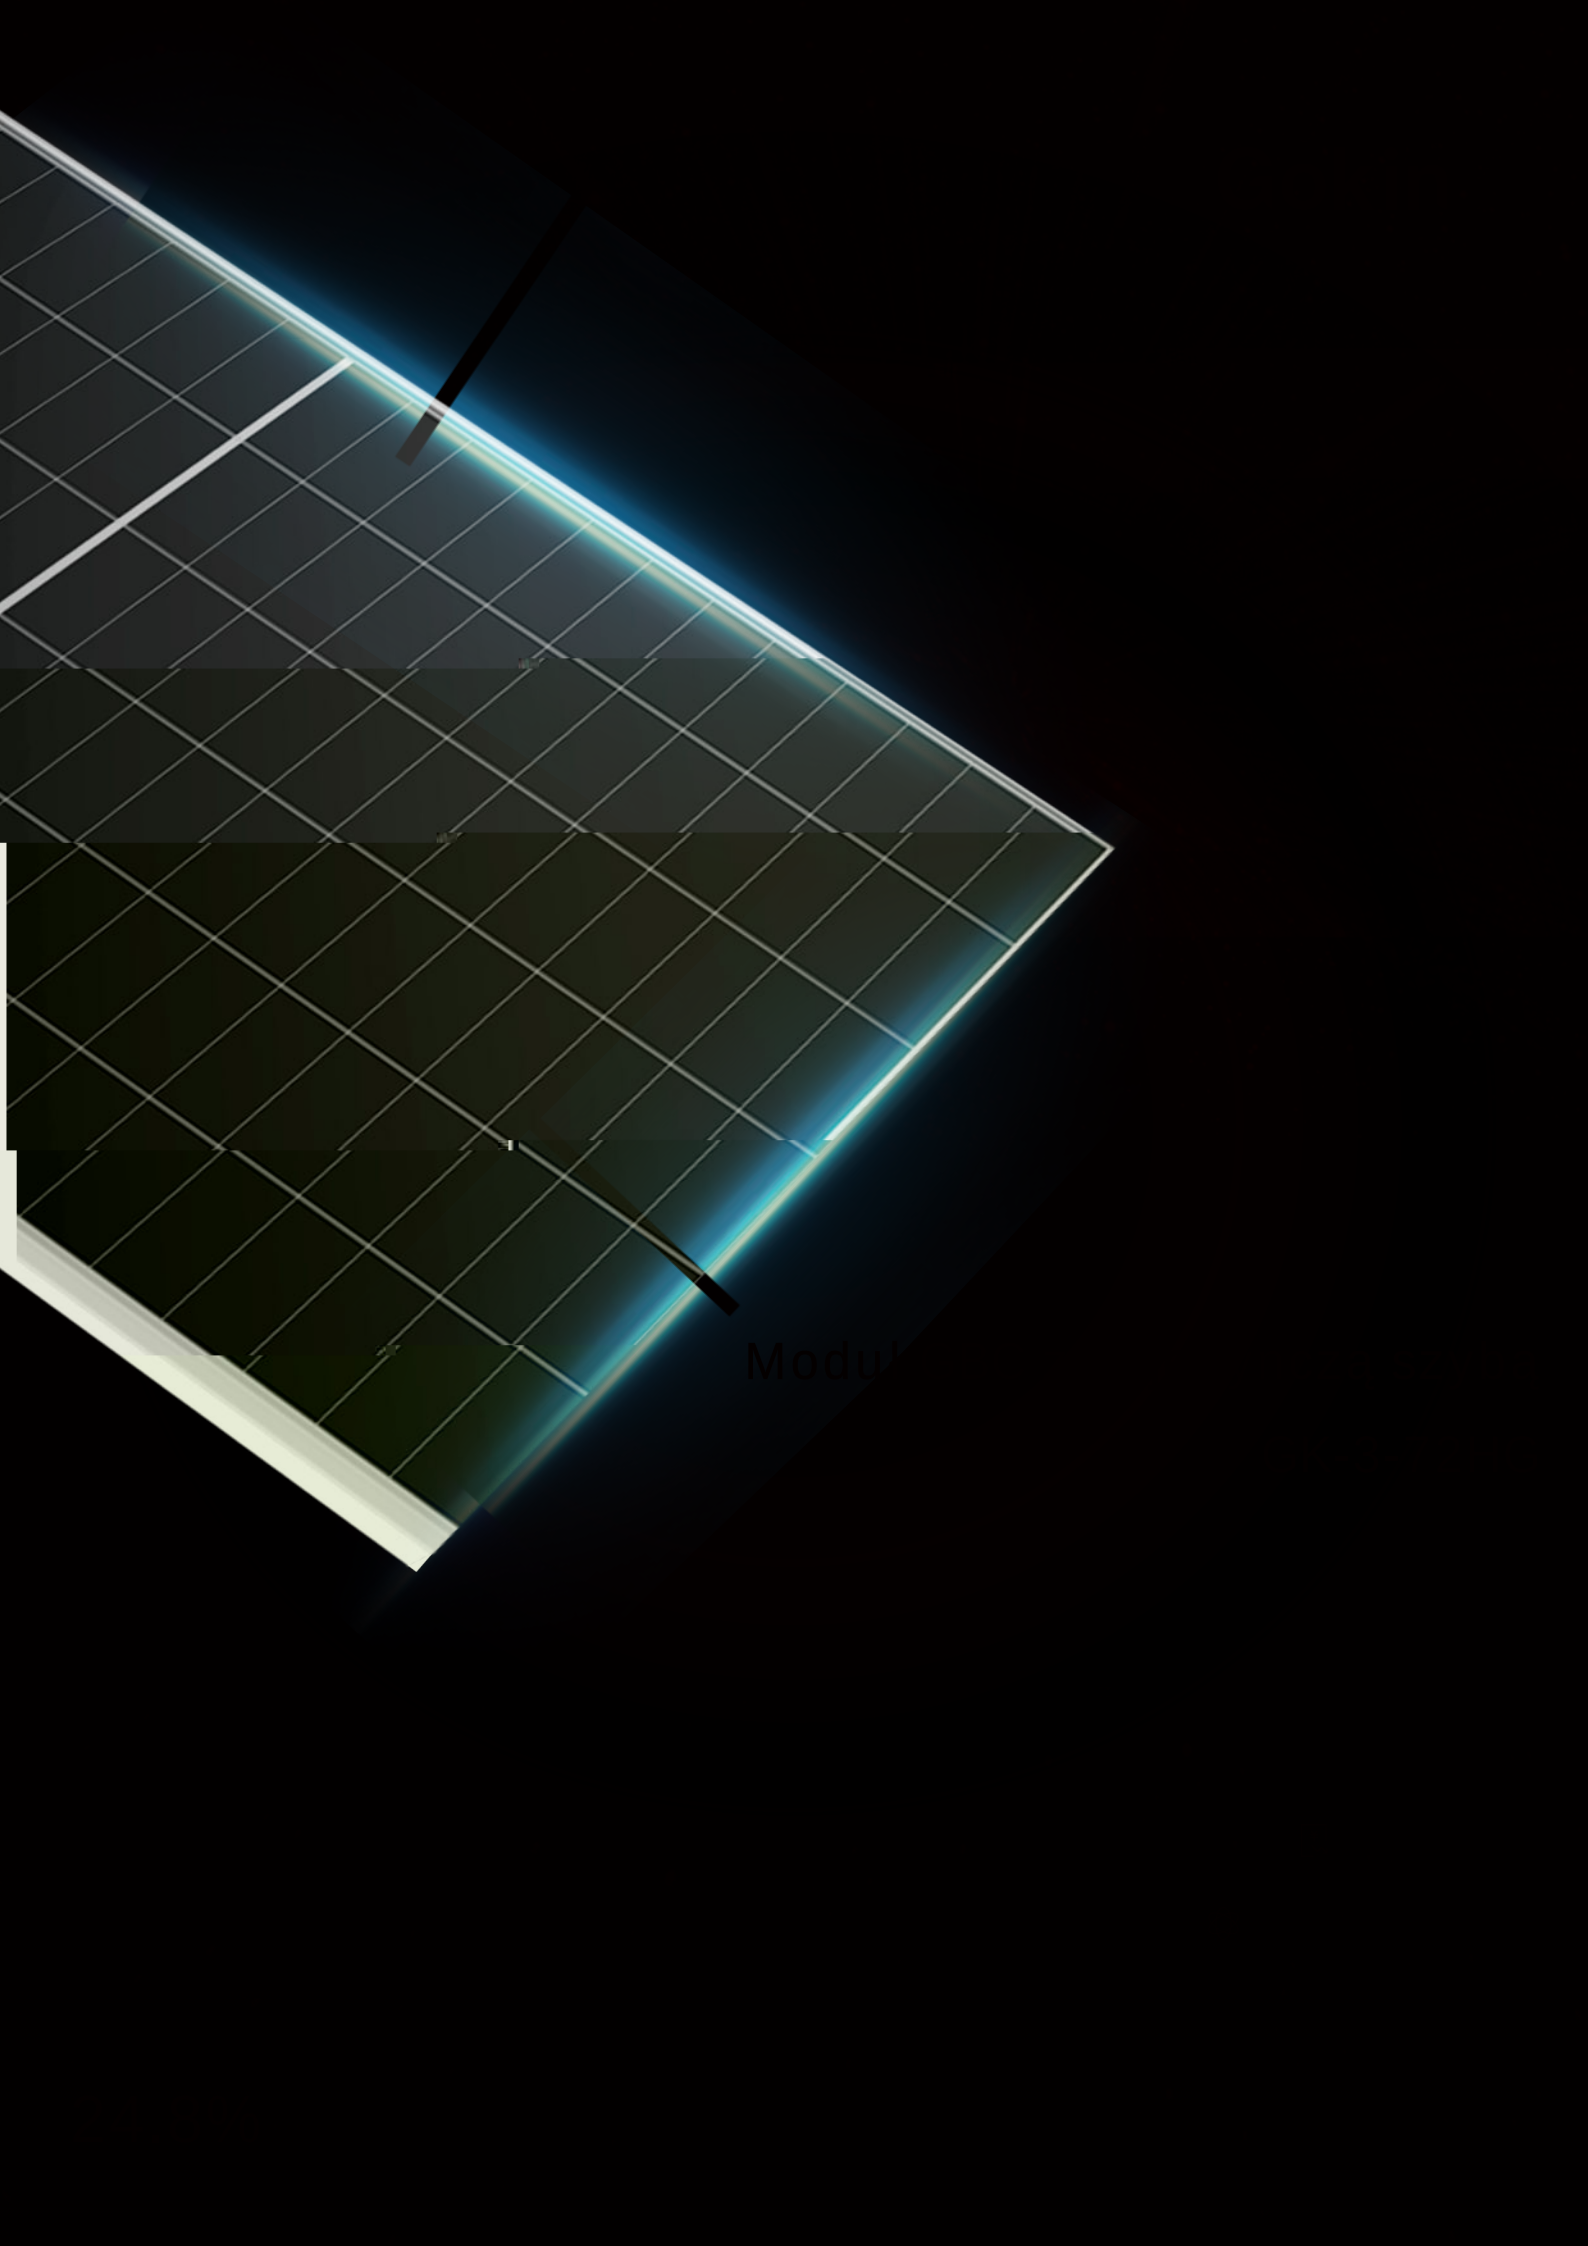

Parametry mechaniczne

	2

Rysunki techniczne

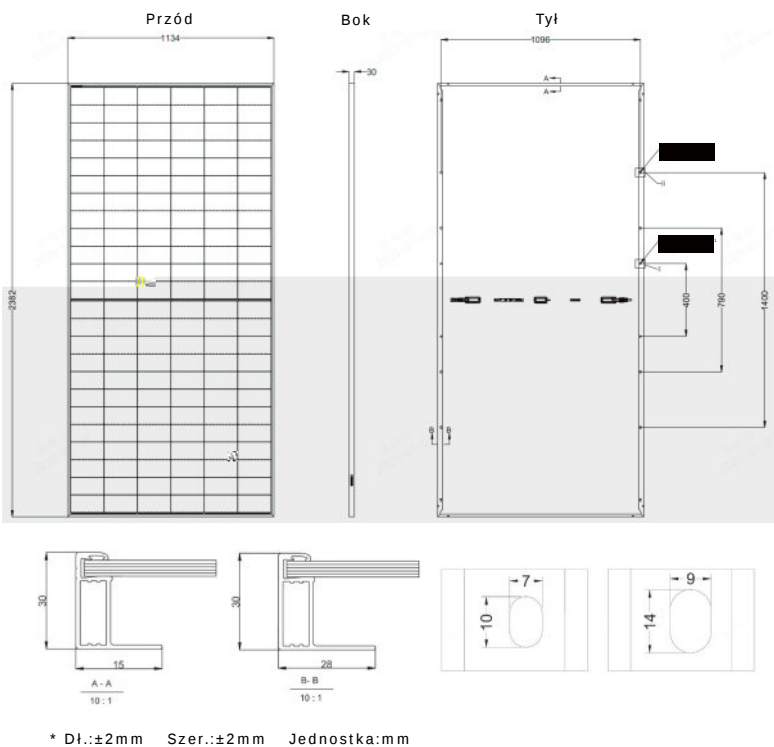

Charakterystyka elektryczna (Test STC)

Typ modułu	GK-3-72HG-640M		GK-3-72HG-645M		GK-3-72HG-650M		GK-3-72HG-655M		GK-3-72HG-660M		GK-3-72HG-665M		GK-3-72HG-670M	
	640	482	645	486	650	490	655	493	660	497	665	501	670	505
	54.20	51.18	54.30	51.28	54.40	51.37	54.50	51.47	54.60	51.56	54.70	51.66	54.80	51.75
	44.90	42.40	45.00	42.50	45.10	42.59	45.20	42.69	45.30	42.78	45.40	42.87	45.50	42.97
	15.00	12.13	15.06	12.18	15.12	12.23	15.18	12.28	15.24	12.32	15.30	12.37	15.36	12.42
	14.26	11.38	14.34	11.44	14.42	11.51	14.50	11.57	14.57	11.63	14.65	11.69	14.73	11.76
	23.7		23.9		24.1		24.2		24.4		24.6		24.8	

1 STC: Natężenie promieniowania 1000 W/m², temperatura ogniwa 25 °C, AM=1,5
2 NOCT: Natężenie promieniowania 800W/M², temperatura otoczenia 20 °C, AM=1,5, prędkość wiatru 1M/S

